



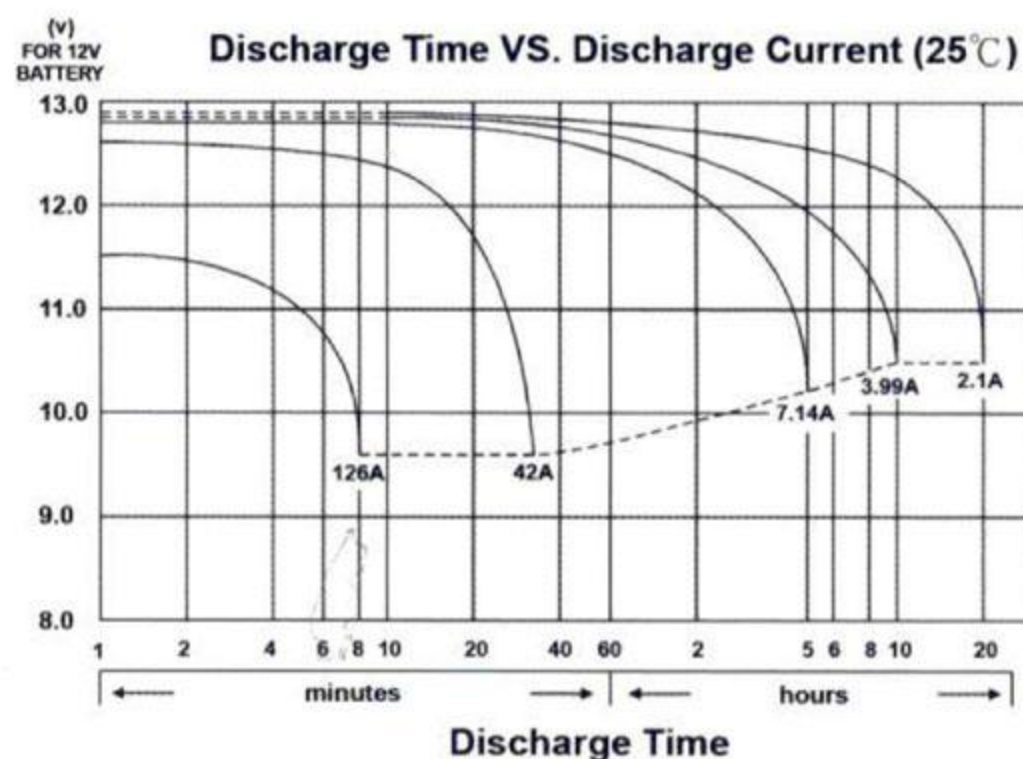

Dimensions

mm(inch)

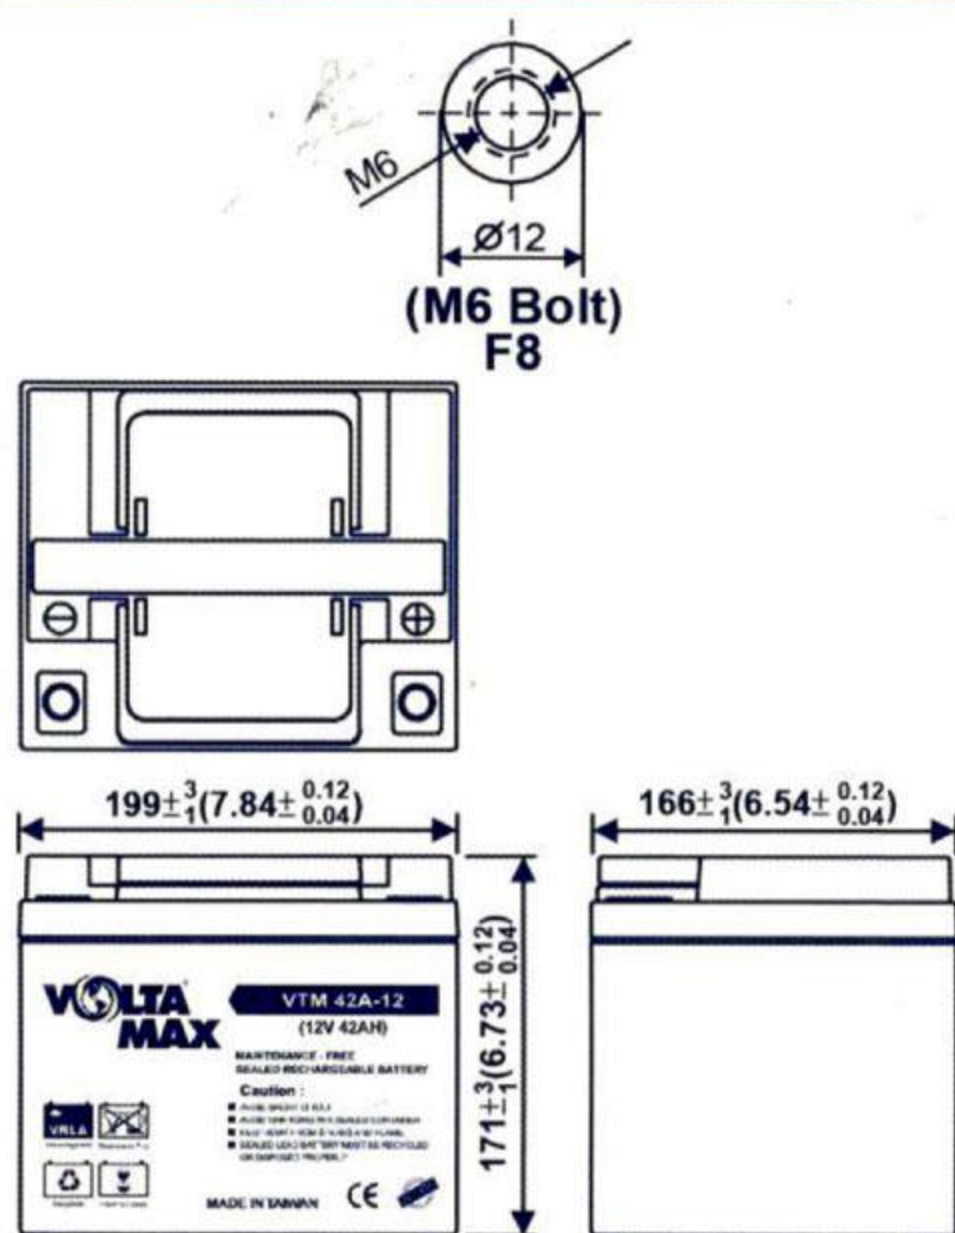

VTM 42A-12

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(2.1A	to	10.50V)	42Ah
10 hour rate	(3.99A	to	10.50V)	39.9Ah
5 hour rate	(7.14A	to	10.20V)	35.7Ah
1 C	(42A	to	9.60V)	23.8Ah
3 C	(126A	to	9.60V)	16.8Ah

Weight Approx. 13.4kg(29.5Lbs.)

Internal Resistance (at 1KHz) Approx. 7.5 mΩ

Maximum Discharge Current for 5 seconds: 630A

Charging Methods at 25°C (77°F)

Cycle use:
 Charging Voltage 14.4 to 15.0V
 Coefficient -5.0mV/°C/cell
 Maximum Charging Current : 12.6A
 Standby use:
 Float Charging Voltage 13.5 to 13.8V
 Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge	-15°C (5°F)	to	40°C (104°F)
Discharge	-15°C (5°F)	to	50°C (122°F)
Storage	-15°C (5°F)	to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material ABS UL94 HB


Terminal F8

Description of torque value of hard ware for the terminals:


Recommended torque value	M6: 7 N-m (71kgf-cm)
Maximum allowable torque value	M6: 9 N-m (92kgf-cm)




Effect of Temperature on Capacity 25°C (77°F)

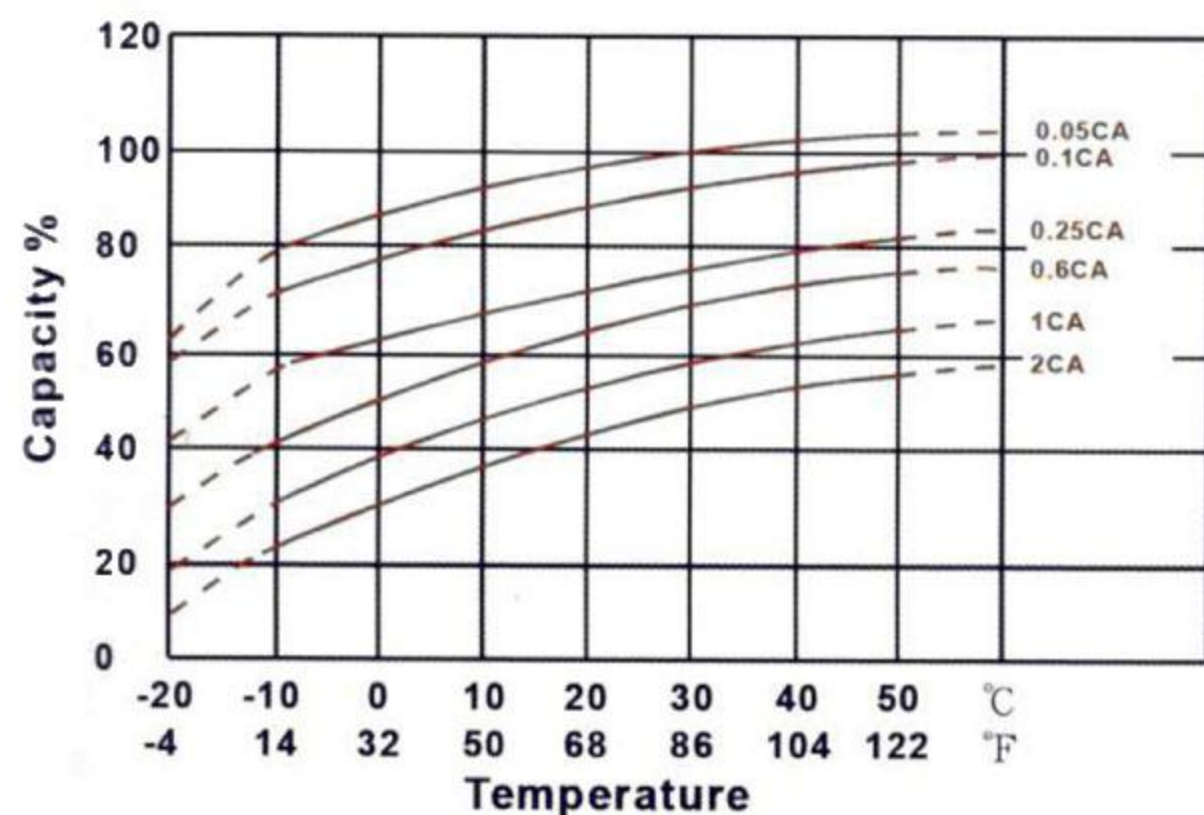

Capacity Retention Characteristic

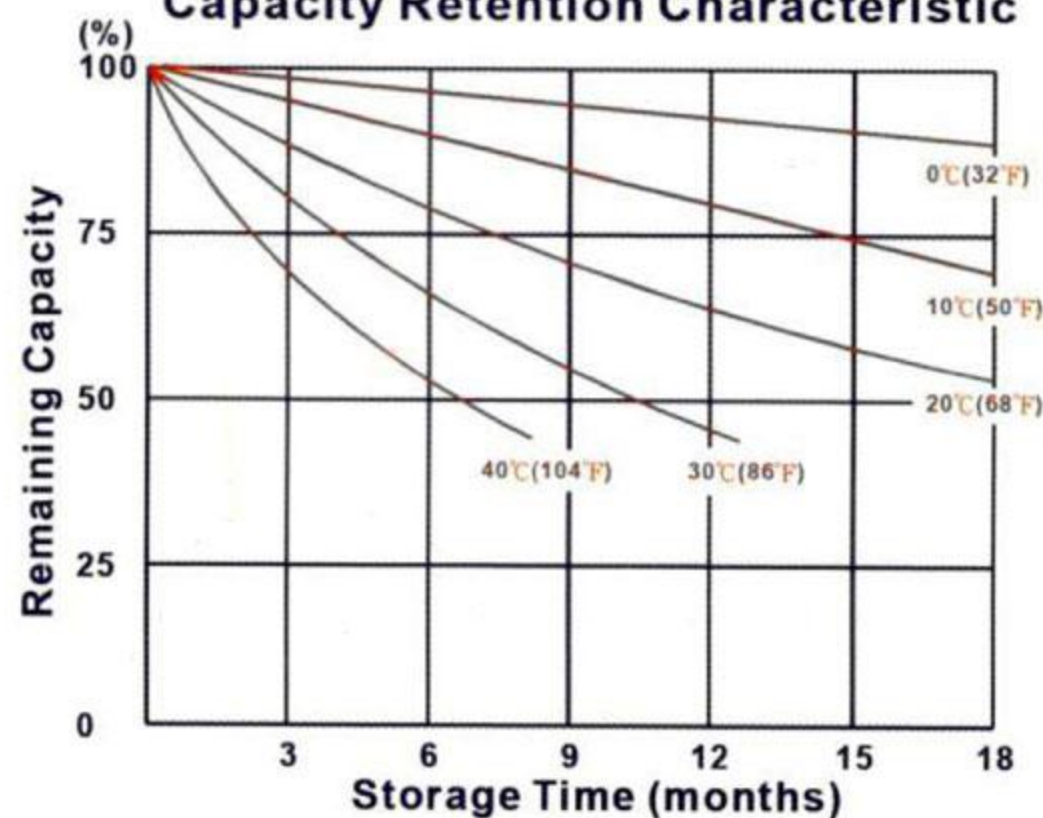

Trickle (or float) Service Life

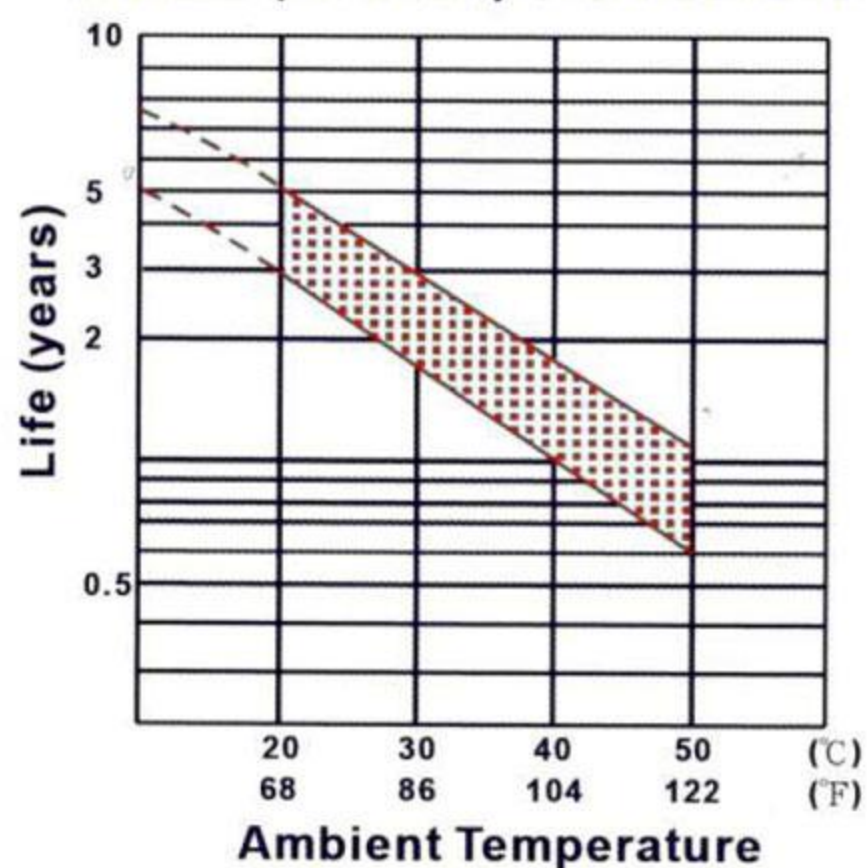

Cycle Service Life

