

B8031FXS - B8033FXS: featuring extremely small dimensions and one of the smallest footprint in its range.




Features and benefits

- High double conversion efficiency and ECO mode for low running costs and environmental impact.
- Transformer free design for light small size layout.
- Removable power modules architecture and built-in diagnostics for easy maintenance and very low MTTR.
- Hot connection/disconnection of parallel units for easy system resizing.
- Full IGBT technology and electronic PFC, ensuring 0.99 input PF and low THDi for maximum upstream sources compatibility.
- Wide range of configurations with internal batteries for low TCO compact solutions.
- High power battery charger, suiting long autonomy applications.
- Dual DSP plus microcontroller logics for top performance and reliability.
- CAN-bus based distributed parallel control ensuring high load sharing accuracy and no single point of failure.
- Comprehensive set of communication options for total remote monitoring of equipment operation.
- Included bypass contactor for complete backfeed protection and operators' safety without additional installation costs.
- Fully compliant with all international product standards for maximum quality guarantee.



Back up time with internal batteries

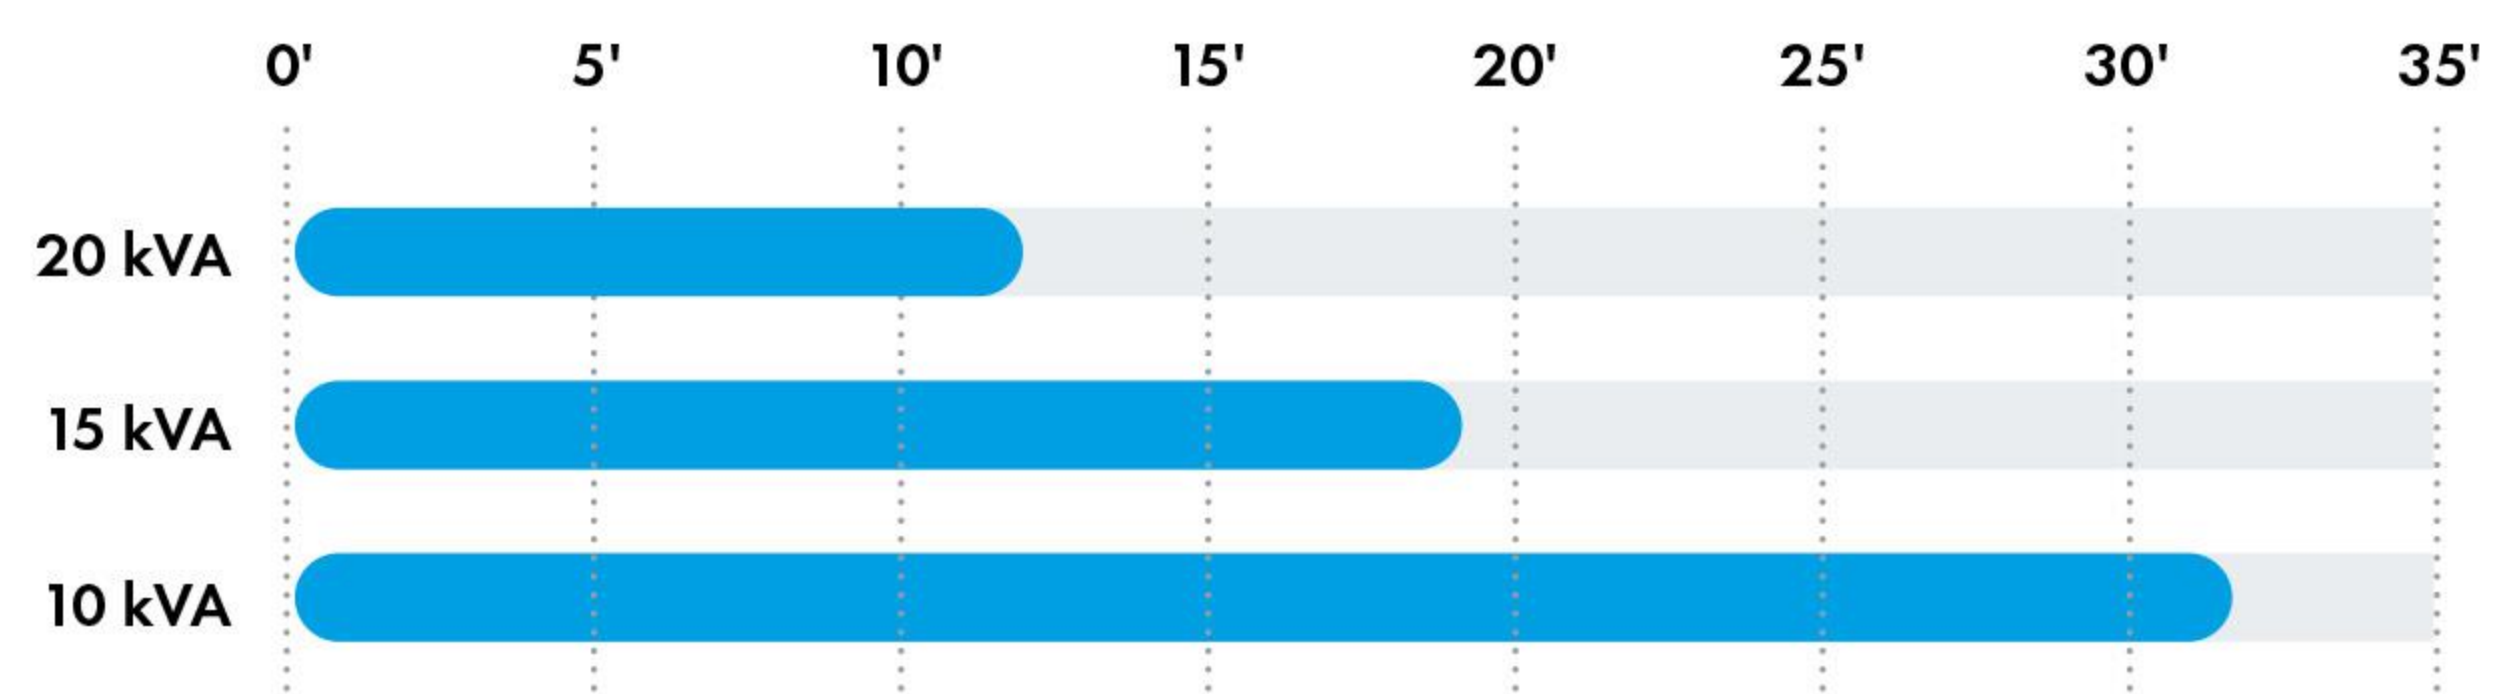

Main options

- Isolation transformer.
- Transformers/autotransformers for voltage adjustment.
- Battery voltage temperature compensation.
- External maintenance bypass wall-mounted box.
- Battery fuse switch wall-mounted box.
- Associated battery cabinets for long autonomy times.
- Parallel redundant up to 6 units for system redundancy
- Load-sync option.
- Input terminals for remote EPO, external manual bypass auxiliary contact, diesel mode.
- Separate bypass input for B8033FXS.

B8031FXS - B8033FXS technical data

Rating (kVA)	10	15	20
Nominal Power (kW)	9	13.5	18
UPS dimensions WxDxH (mm)	450x640x1200		
UPS weight (kg)	100	110	110
UPS weight with internal battery (kg)	247	257	257
External battery module dimensions WxDxH (mm)	500x640x1200		
Battery configuration	Internal or external, 360 to 372 cells, VRLA (other options)		
Max autonomy with int. battery 70% load (min)	32	19	12
Input	B8031FXS (10-15-20 kVA)	B8033 FXS (10-15-20 kVA)	
Connection type	Hardwired 4w (rectifier), 2w (bypass)	Hardwired 4w	
Nominal voltage	400 Vac 3-phase with neutral (rectifier) 220/230/240 Vac 1-phase (bypass)	400 Vac 3-phase with neutral (rectifier) 380/400/415 Vac 3-phase with neutral (bypass)	
Voltage tolerance	-20%, +15% (rectifier); ±10% (bypass)		
Frequency and range	50/60 Hz, 45 to 65 Hz		
Power factor	0.99		
Current distortion (THDi)	<4%		
Output	B8031FXS (10-15-20 kVA)	B8033 FXS (10-15-20 kVA)	
Connection type	Hardwired 2w	Hardwired 4w	
Nominal voltage	220/230/240 Vac 1-phase	380/400/415 Vac 3-phase with neutral	
Frequency	50/60 Hz		
Voltage regulation	Static: ±1% ; Dynamic: IEC/EN 62040-3 Class 1		
Power factor	Up to 0.9, without power derating		
Overload capacity	Inverter: 125% for 10 min, 150% for 30 s ; Bypass: 150% continuous, 1000% for 1 cycle		
Efficiency (AC/AC)*	Up to 98%		
Classification by IEC/EN 62040-3	VFI-SS-11		
Connectivity and function extensions			
Front panel	Graphic display, mimic LED panel and keyboard, local EPO		
Remote communication	Included: serial RS232 and USB; terminal block for battery breaker auxiliary contact. Optional: input terminal block (remote emergency power off, external maintenance bypass circuit breaker aux. cont., diesel mode aux. cont.); SNMP adapter (Ethernet), Web interface (Ethernet), ModBus-TCP/IP (Ethernet), ModBus-RTU (RS485), from ModBus-RTU to PROFIBUS DP adapter; SPDT contact relay board; remote system monitoring panel; UPS managing and server shutdown software		
Optional function extensions	Isolation transformer; transformers/autotransformers for voltage adjustment; external maintenance bypass; custom battery cabinets; wall-mounted battery fuse switch box; battery thermal probe; parallel kit, load-sync for single UPS; other options on request		
System			
Protection degree	IP 20		
Colour	RAL 7016		
Installation layout	10 cm wall-gap, side by side installation allowed		
Accessibility	Front and top access, bottom cable entry		

* according to IEC/EN 62040-3

Other features

Environmental	
UPS operating temperature range	0°C to +40°C
UPS storage temperature range	-10°C to +70°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m
Audible noise at 1 m (dBA)	< 52
Standards and certifications	
Quality assurance, environment, health and safety	ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Environment aspects	IEC/EN 62040-4
Test and performance	IEC/EN 62040-3
Protection degree	IEC 60529
Marking	CE