


LEO II

650-2000VA

Compact Size

Microprocessor Control

Cold Start

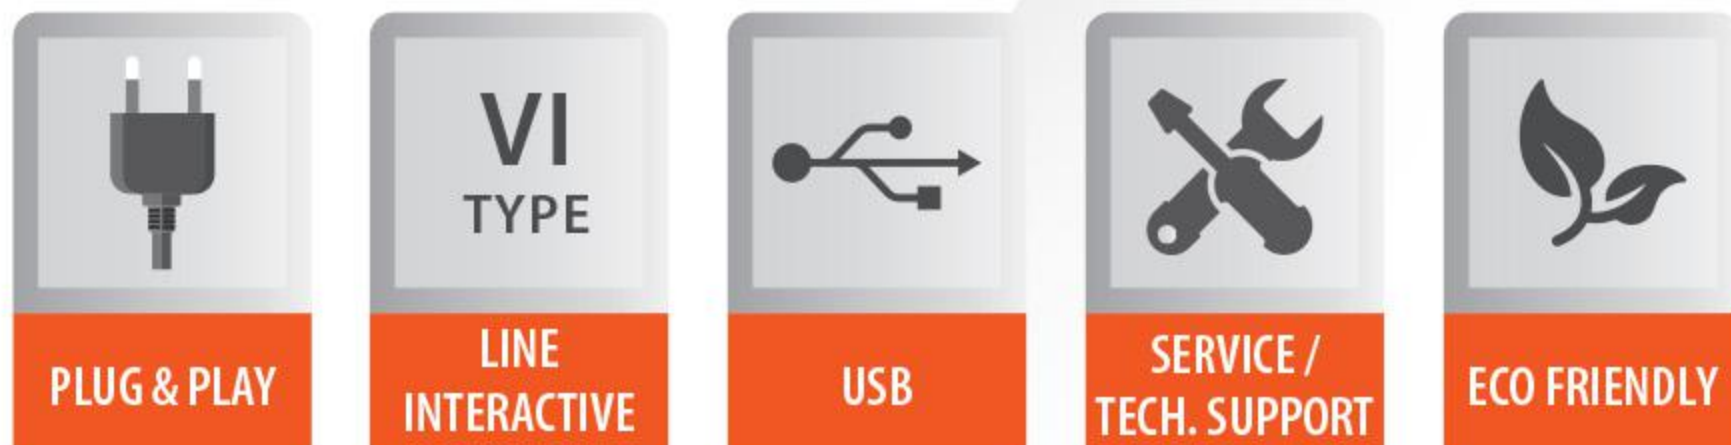

مشخصات فنی

راه اندازی مجدد خودکار در حالی که AC در حال بازیابی است
خروجی موج سینوسی شبیه سازی شده
شارژ خارج از حالت
عملکرد شروع سرد
سازگار با ژنراتور (اختیاری)

اندازه جمع و جور
صفحه نمایش لمسی LCD برای نمایش اطلاعات UPS
به صورت دایره ای (اختیاری)
پورت ارتباطی USB، RJ11 (اختیاری)
کنترل ریزپردازنده عالی، قابلیت اطمینان بالا را
تضمین می کند
تقویت و باک AVR برای تثبیت ولتاژ

TECHNICAL SPECIFICATIONS

MODEL		LEO II 650 LED LEO II 650 LCD		LEO II 850 LED LEO II 850 LCD		LEO II 1000 LED LEO II 1000 LCD		LEO II 1500 LED LEO II 1500 LCD		LEO II 2000 LED LEO II 2000 LCD	
Capacity		650VA / 360W		850VA / 480W		1000VA / 600W		1500VA / 900W		2000VA / 1200W	
INPUT											
Voltage		110/120 VAC* or 220/230/240 VAC									
Voltage range		81 - 245 VAC* / 162 - 290 VAC									
Frequency range		50Hz / 60Hz (auto sensing)									
OUTPUT											
Output voltage		110/120 VAC* or 220/230/240 VAC									
AC voltage regulation (batt. mode)		± 10%									
Frequency range (batt. mode)		50Hz / 60Hz ± 1Hz									
Transfer time		Typical 2-6 ms									
Waveform (batt. mode)		Simulated Sinewave									
BATTERY											
Battery type & number		12V / 7Ah x 1		12V / 9Ah x 1		12V / 7Ah x 2		12V / 9Ah x 2			
Typical recharge time		4-6 hours recover to 90% capacity									
BATTERIES											
LCD display		Input voltage, output voltage, battery capacity, load level and UPS status									
LED display	AC Mode	Green lighting									
	Battery Mode	Green flashing					Yellow flashing				
	Fault	-					Red flashing				
PROTECTION											
Full protection		Overload, discharge, and overcharge protection									
ALARM											
Battery mode		Sounding every 10 seconds									
Low battery		Sounding every seconds									
Overload		Sounding every 0.5 seconds									
Fault		Continuously sounding									
PHYSICAL											
LCD display	Dimension (mm) HxWxD	142x101x300					182x130x320				
	Net weight (kg)	4.4	5		8.2		10.4		10.6		
LED display	Dimension (mm) HxWxD	142x101x279					182x130x320				
	Net weight (kg)	4.2	4.9		8.2		10.4		10.6		
ENVIRONMENT											
Humidity		0 - 90% RH @ 0°C - 40°C (non-condensing)									
Noise level		< 40 dBA									
* 110/120VAC system is only available for 650/850VA and production will be upon order.											