


EA800

6 kVA ~ 10 kVA (1:1)
10 kVA ~ 30 kVA (3:1)
PF 0.8



Features

- Single / single-phase, three / single-phase models with on-line double conversion technology
- DSP (Digital Signal Processors) technology
- Suitable for all kinds of loads (resistive, inductive and non-linear loads etc)
- High overload capability (up to 150%)
- Bypass dual DSP control design to enhance more reliability(10–30 kVA)
- Supports dual input, hot standby in series
- Redundant & parallelable with advanced parallel current-sharing control technology (10 - 30 kVA)
- Cold start and mains start function
- High charging capability: 2 A / 4 A / 6 A / 8 A / 10 A / 12 A selectable (standard), 14 A / 16 A / 18 A / 20 A / 22 A / 24 A selectable (options)(10–30 kVA)
- Standard configuration with output isolation transformer
- Superior protection (surge, short-circuit, overvoltage, undervoltage, overcharge, reverse battery protection etc.)
- Advanced communications: RS232 and USB ports (standard), SNMP, dry contacts and RS485 (options)
- Other options (parallel kits, input isolation transformer, bypass isolation transformer and harmonic suppressor)

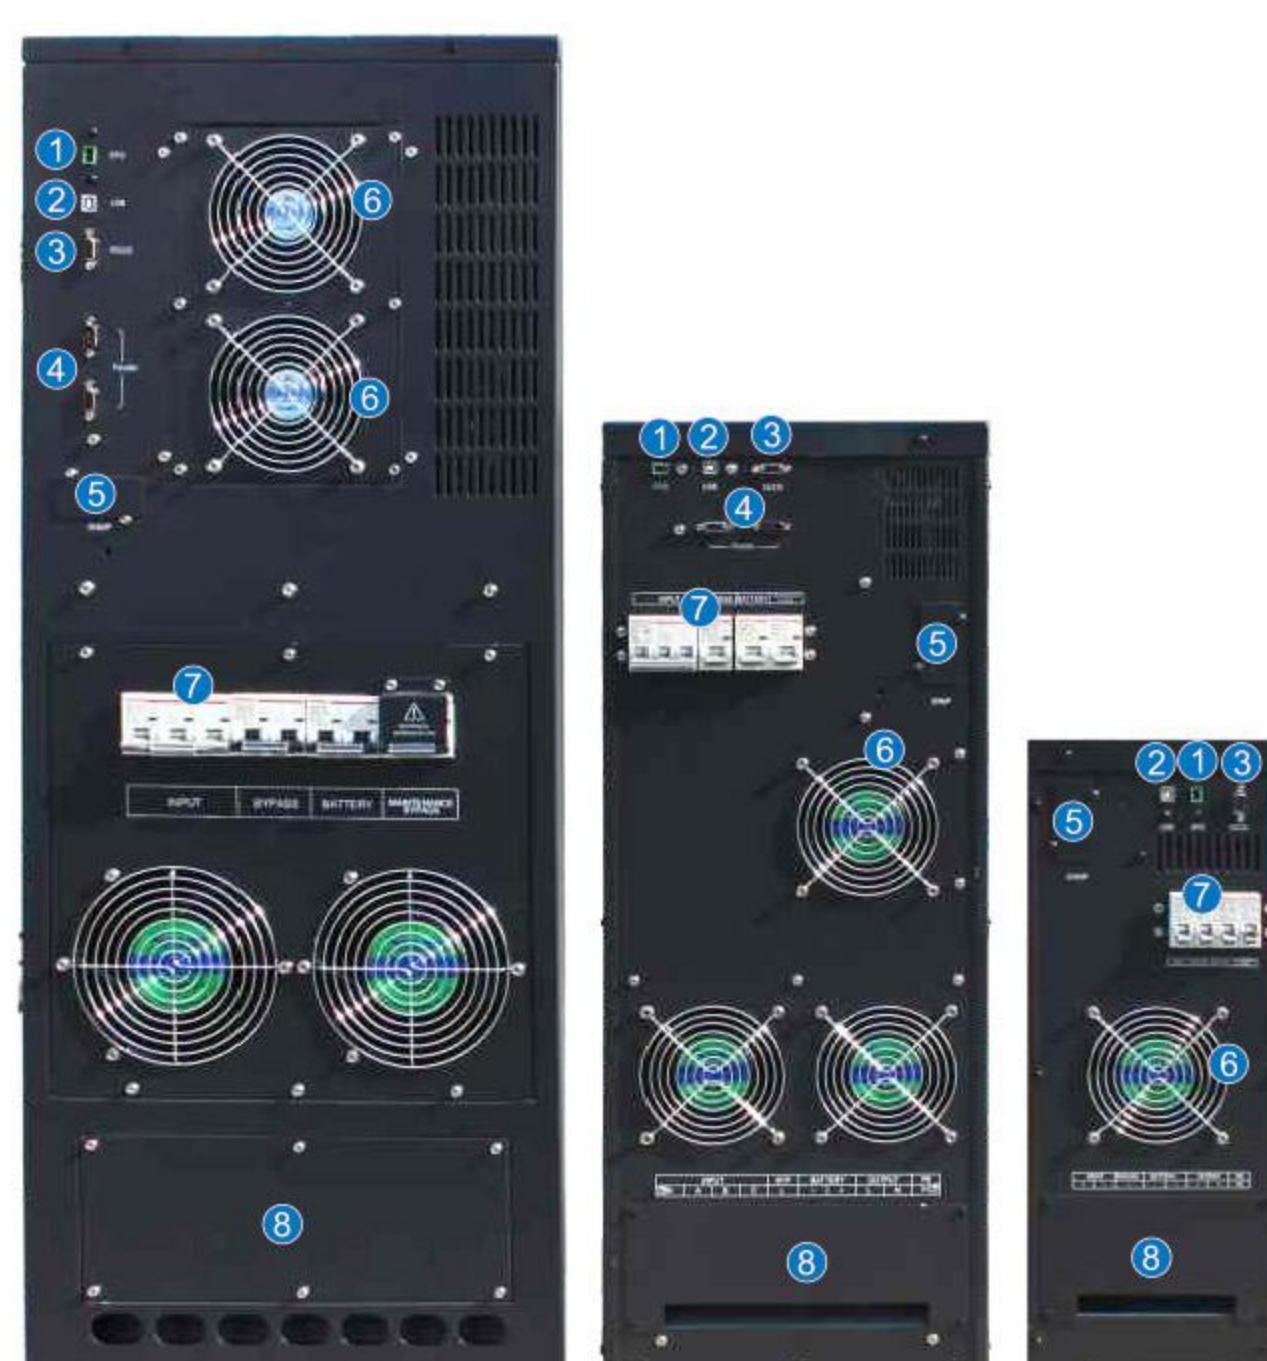

پنل پشتی

- EPO -1
USB -2
RS232 -3
پورت پارالل اختیاری -4
SNMP -5
فн -6
جداگذنده -7
ترمینال -8

Specifications

MODEL	EA806 (1:1)	EA810 (1:1)	EA810 (3:1)	EA815 (3:1)	EA820 (3:1)	EA830 (3:1)
Capacity	6 kVA / 4800 W	10 kVA / 8 kW	10 kVA / 8 kW	15 kVA / 12 kW	20 kVA / 16 kW	30 kVA / 24 kW
INPUT						
Input wiring	Single-phase three-wire (1Φ+N+PE)		Three-phase five-wire (3Φ+N+PE)			
Rated voltage	220 / 230 / 240 Vac		380 / 400 / 415 Vac			
Voltage range	165 ~ 275 Vac		285 ~ 475 Vac			
Rated frequency		50 / 60 Hz				
Frequency range		40 ~ 70 Hz				
Bypass voltage range		± 25% (settable)				
OUTPUT						
Output wiring		Single-phase three-wire (1Φ+N+PE)				
Rated voltage		220 / 230 / 240 Vac				
Output voltage regulation		± 1%				
Rated frequency		50 / 60 Hz (settable)				
Output frequency regulation		50 / 60 Hz ± 0.1 Hz in battery mode				
Waveform		Sinusoidal				
Power factor		0.8				
Voltage distortion (THDv)		≤ 2% (linear load); ≤ 5% (non-linear load)				
Crest factor		3:1				
Overload	105% ~ 125% for 10 min, 125% ~ 150% for 1 min, 150% ~ 200% for 200 ms, > 200% for 100 ms					
BATTERIES						
DC voltage		192 Vdc				
Number of batteries		12 V × 16 pcs				
Charging voltage		216 Vdc				
EOD		168 Vdc				
Charging current		Default 8 A (2 A / 4 A / 6 A / 8 A / 10 A / 12 A selectable)				
SYSTEM						
Max. number of parallel connections	/		2			
Protections		Short-circuit, overload, overvoltage, undervoltage, low battery, overtemperature				
Communications		RS232 / USB (standard); RS485 / SNMP / dry contacts (optional)				
OTHERS						
Operating temperature		0 ~ 40°C				
Storage temperature		– 25°C ~ 55°C (without batteries)				-۱ اسلات هوشمند
Relative humidity		0 ~ 95% (non-condensing)				-۲ فن ها
Altitude		≤ 1000 m (derating 1% for each additional 100 m)				-۳ پورت پارالل
IP rating		IP 20				-۴ RS232
Noise level at 1 m		< 60 dB				-۵ خاموشی اضطراری
Dimensions (W × D × H) (mm)	210 × 585 × 590	310 × 600 × 880		400 × 815 × 1100		-۶ USB پورت
Packaged dimensions (W × D × H) (mm)	328 × 716 × 805	430 × 710 × 1080		525 × 925 × 1305		-۷ تشخیص دما
Net weight (kg)	54	104	140	210	240	-۸ GND -۹ جدایی پس
Gross weight (kg)	64	113	153	225	255	-۱۰ ترمیمهای کاور
						-۱۱ پک باتری

- All specifications subject to change without notice.
- Custom-made specifications are acceptable.
- This product is applicable to industrial, commercial, financial, rail transit and other industries applications, but not available for life support systems.
- For critical systems related to public safety or significant economic benefits, dual power system is required to power the load.

تهران - خیابان مطهری - خیابان مهرداد - نرسیده به خیابان اصلی پور - ساختمان تسلا

021-88860000

WWW.TESLAUPS.IR